


Micro-header Breakout Board

BRK-DRM-XX

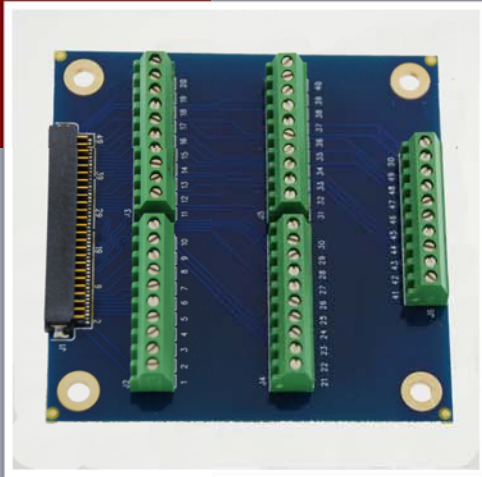

Current Rating:
2A @ 80°C ambient

Insertion Force:
2.5oz (0.69N)

Withdrawl Force:
2.0oz (0.56N)

Wire Entry Diameter:
Solid:
0.03 - 1.00 mm²

Stranded:
0.03 - 0.75 mm²

Form Factor:
2.5" x 2.5"
(63.5mm x 63.5mm)

Operating Temp:
-55°C to +125°C **

Operating Humidity:
5% to 95%
non-condensing

Storage Temp:
-55°C to +125°C

The BRK-DRM-XX is an accessory breakout board designed for Saiko Systems modules which house double-row micro-pitch headers. Featuring standard screw terminals, the breakout board allows designers to quickly and easily interface signals from any module.

The breakout board can be connected directly to right-angle connectors or to straight connectors via a ribbon cable (sold separately).

The BRK-DRM-XX is available in 10, 20, 30, 40, or 50 pin configurations.

Ordering Information

BRK - DRM - _____



10 : 10-pin breakout board
20 : 20-pin breakout board
30 : 30-pin breakout board
40 : 40-pin breakout board
50 : 50-pin breakout board

**Stand-offs, Nuts, and Screws are provided with all boards